



# **Finite Deformation by Elasticity, Slip, and Twinning: Atomistic Considerations, Continuum Modeling, and Application to Ceramic Crystals**

**by John D. Clayton**

**ARL-RP-244**

**March 2009**

*A reprint from the 15th International Symposium on Plasticity and Its Current Applications,  
St. Thomas, U.S. Virgin Islands, pp. 274–276, 3–8 January 2009.*

## **NOTICES**

### **Disclaimers**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

# **Army Research Laboratory**

Aberdeen Proving Ground, MD 21005-5069

---

**ARL-RP-244****March 2009**

---

## **Finite Deformation by Elasticity, Slip, and Twinning: Atomistic Considerations, Continuum Modeling, and Application to Ceramic Crystals**

**John D. Clayton**

**Weapons and Materials Research Directorate, ARL**

*A reprint from the 15th International Symposium on Plasticity and Its Current Applications,  
St. Thomas, U.S. Virgin Islands, pp. 274–276, 3–8 January 2009.*

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>					
1. REPORT DATE (DD-MM-YYYY) March 2009		2. REPORT TYPE Reprint		3. DATES COVERED (From - To) October 2007–October 2008	
4. TITLE AND SUBTITLE Finite Deformation by Elasticity, Slip, and Twinning: Atomistic Considerations, Continuum Modeling, and Application to Ceramic Crystals				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) John D. Clayton				5d. PROJECT NUMBER AH80	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-WM-TD Aberdeen Proving Ground, MD 21005-5069				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-RP-244	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES A reprint from the <i>15th International Symposium on Plasticity and Its Current Applications</i> , St. Thomas, U.S. Virgin Islands, pp. 274–276, 3–8 January 2009.					
14. ABSTRACT A continuum theory is developed for modeling elasticity, plasticity, and twinning in single crystals of arbitrary anisotropy, subjected to arbitrarily large deformations. Concepts from discrete lattice models are considered for estimating resistances to inelastic shear. Nonlinear thermoelastic calculations are used in conjunction with experimental shock physics observations to provide estimates for resistances to slip, twinning, and shear fracture on preferred planes in alumina single crystals (i.e., rhombohedral corundum or sapphire).					
15. SUBJECT TERMS ceramic, plasticity, defects, modeling					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  UU	18. NUMBER OF PAGES  10	19a. NAME OF RESPONSIBLE PERSON John D. Clayton
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 410-278-6146

# FINITE DEFORMATION BY ELASTICITY, SLIP, AND TWINNING: ATOMISTIC CONSIDERATIONS, CONTINUUM MODELING, AND APPLICATION TO CERAMIC CRYSTALS

John D. Clayton

Impact Physics, U.S. Army Research Laboratory  
Aberdeen Proving Ground, MD, USA 21005-5066  
jclayton@arl.army.mil

**ABSTRACT:** A continuum theory is developed for modeling elasticity, plasticity, and twinning in single crystals of arbitrary anisotropy, subjected to arbitrarily large deformations. Concepts from discrete lattice models are considered for estimating resistances to inelastic shear. Nonlinear thermoelastic calculations are used in conjunction with experimental shock physics observations to provide estimates for resistances to slip, twinning, and shear fracture on preferred planes in alumina single crystals (i.e., rhombohedral corundum or sapphire).

**INTRODUCTION:** Large deformation theory is needed for an accurate description of finite shear strains associated with slip and deformation twinning and improper lattice rotations across twin boundaries. Nonlinear anisotropic elasticity is also necessary for accurately describing the response of ceramic single crystals to high pressure loading, for example plate impact or explosively driven shock (Graham & Brooks [1971]).

**PROCEDURES, RESULTS, AND DISCUSSION:** The deformation gradient  $\mathbf{F}$  is decomposed multiplicatively as

$$F_{.A}^a = F_{.a}^{Ea} F_{.b}^{Ia} F_{.A}^{Pb} = F_{.a}^{Ea} \bar{F}_{.A}^a, \quad (1)$$

where  $\mathbf{F}^E$  accounts for thermoelasticity,  $\mathbf{F}^I$  for twinning shears, and  $\mathbf{F}^P$  for dislocation glide. Skew components of the covariant derivative of  $\mathbf{F}^P$  can be used to construct a density of geometrically necessary dislocations associated with slip. In fact, Nye's [1953] theory followed from observations of slip traces in transparent corundum. A density of partial dislocations associated with incompatibility of twins follows from the gradient of  $\mathbf{F}^I$ . A net Burgers vector  $\bar{\mathbf{b}}$  is, from integration over circuit  $C$  encircling reference area  $A$  with normal  $\mathbf{N}$ :

$$\bar{b}^\alpha = -\oint_C \bar{F}_{.A}^\alpha dX^A = \int_A \bar{\alpha}^{\alpha A} N_A dA, \quad \bar{\alpha}^{\alpha A} = \epsilon^{ABC} \left( \underbrace{F_{.b}^{Ia} F_{.B,C}^{Pb}}_{\text{slip gradients}} + \underbrace{F_{.b,C}^{Ia} F_{.B}^{Pb}}_{\text{twin partials}} \right). \quad (2)$$

Contributions of slip gradients to the Burgers vector have been described elsewhere (Nye [1953], Clayton et al. [2005]). The final term on the right in the second of (2) results from gradients in twin fractions, e.g. interface dislocations at tapered twin boundaries. Disclination models of twins (Clayton et al. [2005]) could complement such a description. The Helmholtz free energy per unit relaxed volume of crystal is prescribed as

$$\bar{\Psi} = \underbrace{\frac{1}{2} E_{\alpha\beta}^E \bar{C}^{\alpha\beta\chi\delta} E_{\chi\delta}^E}_{\text{second order elasticity}} + \underbrace{\frac{1}{6} E_{\alpha\beta}^E \bar{C}^{\alpha\beta\chi\delta\epsilon\phi} E_{\chi\delta}^E E_{\epsilon\phi}^E}_{\text{third order elastic constants}} - \underbrace{\bar{\beta}^{\alpha\beta} E_{\alpha\beta}^E (\theta - \theta_0)}_{\text{thermoelastic coupling}} - \underbrace{\bar{c} \theta \log \left( \frac{\theta}{\theta_0} \right)}_{\text{specific heat}} + \underbrace{\bar{\Psi}^R}_{\text{lattice defects}}. \quad (3)$$

In (3),  $\mathbf{E}^E$  is the Green elastic strain,  $\bar{C}$  are elastic coefficients,  $\bar{\beta}$  are thermal stress coefficients, and  $\bar{c}$  is the specific heat. Kinetic relations for slip and twinning are written

$$\dot{\gamma}^i = \dot{\gamma}_s \left| \frac{\bar{\tau}^i}{\bar{g}^i} \right|^m \frac{\bar{\tau}^i}{|\bar{\tau}^i|}, \quad \dot{\gamma}_j^i = \dot{\gamma}_s \left| \frac{\bar{\tau}_j^i}{\bar{g}_j^i} \right|^m \frac{\bar{\tau}_j^i}{|\bar{\tau}_j^i|}, \quad \dot{f}^j = \frac{\dot{\gamma}_T}{s^j} \left| \frac{\langle \bar{\tau}^j \rangle}{\bar{g}^j} \right|^p, \quad (4)$$

where  $\dot{\gamma}^i$  and  $\dot{\gamma}_j^i$  are slip rates for slip system  $i$  in the parent crystal and for slip system  $i$  in twin fraction  $j$ ,  $\dot{f}^j$  is the rate of evolving volume fraction of twin  $j$  with characteristic shear  $s^j$ ,  $\bar{\tau}$  is the resolved Eshelby or Kirchhoff stress,  $\bar{g}$  are resistances that evolve with the thermodynamic state, and remaining terms are constants. The crystal structure and relevant systems for slip and twinning in sapphire are shown in Fig. 1. A full close-packed layer of O atoms lies in between each partially filled (0001) plane of Al atoms in the hexagonal cell.

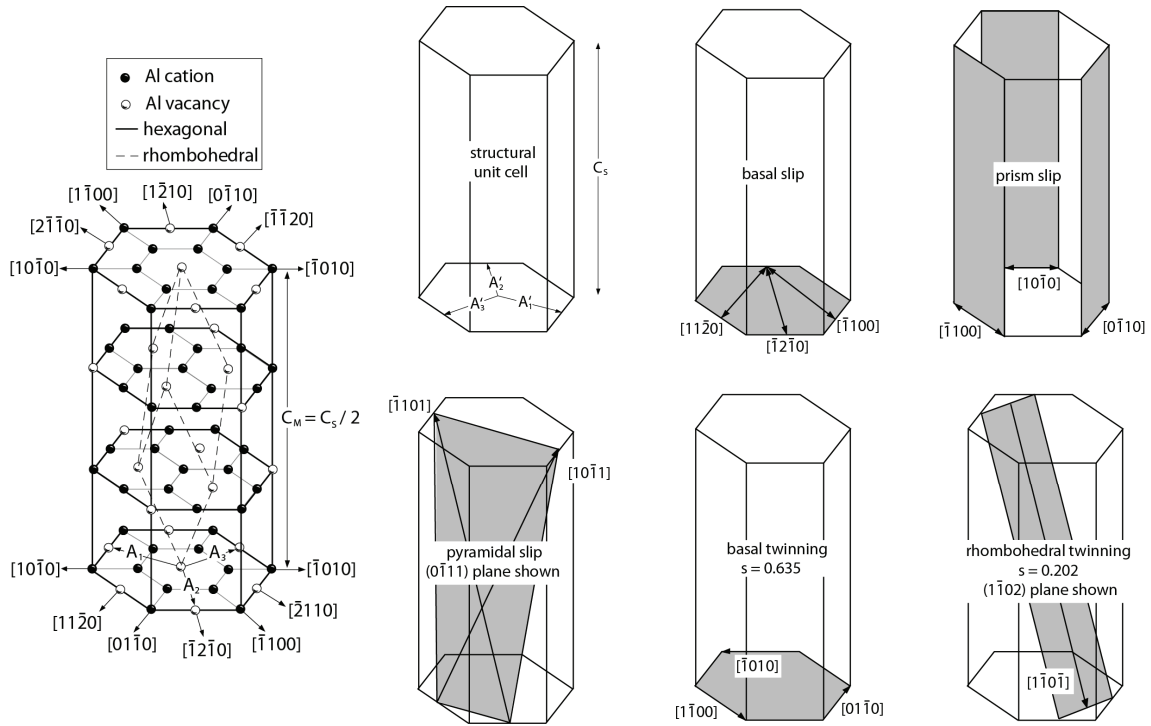


Fig. 1 Unit cells of sapphire, after Kronberg [1957], and slip and twin systems.

Because of sapphire's brittle nature, values of  $\bar{g}$  must be inferred from experiments where confining pressures are high, such as shock loading (Graham & Brooks [1971]), indentation (Tymiak & Gerberich [2007]), or must be extrapolated from high temperature data. Previous research indicates that the Peierls stress concept may provide insight into the low

temperature slip resistance (Farber et al. [1993]); the ratio of stacking fault energy to Burgers vector may approximate the twin nucleation stress; and the theoretical shear fracture strength of the crystal may be approached in shock physics experiments (Graham & Brooks [1971]). Values of these theoretical quantities are found as

$$\tau_C^{Peierls} = (2\mu / K) \exp(-2\pi d / (Kb)), \quad \tau_C^{twin} = W_{SF} / b, \quad \tau_C^{fracture} = \mu b / (2\pi d), \quad (5)$$

where  $\mu$  is the rhombohedral shear modulus,  $K$  accounts for dislocation line geometry and anisotropy,  $b$  is the magnitude of the local Burgers vector,  $d$  is the interplanar spacing, and  $W_{SF}$  is the appropriate stacking fault energy. Anisotropic nonlinear elasticity is used here to compute more accurate estimates for  $\tau_C$ , and hence  $\bar{g}$  in the limit of rate independent inelasticity. Resolved shear stresses for basal and prismatic slip, basal and rhombohedral twinning, and fracture on pyramidal and rhombohedral planes are calculated during uniaxial straining of single crystals of various orientations. Stress values computed at the Hugoniot elastic limit (Graham & Brooks [1971]) provide the bounds in the first data column of Table 1. These bounds compare favorably with those from indentation (Tymiak & Gerberich [2007]), but differ substantially from order-of-magnitude estimates computed via (5).

Table 1: Bounds on low temperature shear strengths for slip, twinning, and fracture.

Mechanism	$\tau_C$ [GPa] present work	$\tau_C$ [GPa] theory <sup>(1)</sup>	$\tau_C$ [GPa] indentation <sup>(2)</sup>
basal slip	$2.7 < \tau_C < 5.0$	9.0	$4.8 < \tau_C < 23.7$
prism slip	$2.3 < \tau_C < 5.7$	0.3	$2.5 < \tau_C < 4.1$
pyramidal slip	--	0.7	7.0
basal twin	$\tau_C > 4.0$	7.3	$4.8 < \tau_C < 7.3$
rhombohedral twin	$1.0 < \tau_C < 8.1$	3.6	$1.0 < \tau_C < 7.3$
prism fracture	$\tau_C > 5.9$	40.5	--
pyramidal fracture	$\tau_C > 6.7$	30.6	--
rhombohedral fracture	$\tau_C > 7.9$	34.4	--

<sup>(1)</sup>Equation (5)    <sup>(2)</sup>Tymiak & Gerberich [2007]

## REFERENCES:

- Clayton, J.D., Bammann, D.J., and McDowell, D.L. 2005, "A geometric framework for the kinematics of crystals with defects", *Phil. Mag.* **85**, 3983.
- Farber, Y.A., Yoon, S.Y., Lagerlof, K.P.D., and Heuer, A.H. 1993, "Microplasticity during high temperature indentation and the Peierls potential of sapphire ( $\alpha$ -Al<sub>2</sub>O<sub>3</sub>) single crystals", *Phys. Stat. Solidi A* **137**, 485.
- Graham, R.A. and Brooks, W.P. 1971, "Shock-wave compression of sapphire from 15 to 420 kbar. The effects of large anisotropic compressions", *J. Chem. Phys. Solids* **32**, 2311.
- Kronberg, M.L. 1957, "Plastic deformation of single crystals of sapphire: basal slip and twinning", *Acta Metall.* **5**, 507.
- Nye, J.F. 1953, "Some geometrical results in dislocated crystals", *Acta Metall.* **1**, 153.
- Tymiak, N.I. and Gerberich, W.W. 2007, "Initial stages of contact-induced plasticity in sapphire. I. Surface traces of slip and twinning", *Phil. Mag.* **87**, 5143.

NO. OF  
COPIES ORGANIZATION

1 DEFENSE TECHNICAL  
(PDF INFORMATION CTR  
only) DTIC OCA  
8725 JOHN J KINGMAN RD  
STE 0944  
FORT BELVOIR VA 22060-6218

1 DIRECTOR  
US ARMY RESEARCH LAB  
IMNE ALC HR  
2800 POWDER MILL RD  
ADELPHI MD 20783-1197

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRD ARL CI OK TL  
2800 POWDER MILL RD  
ADELPHI MD 20783-1197

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRD ARL CI OK PE  
2800 POWDER MILL RD  
ADELPHI MD 20783-1197

ABERDEEN PROVING GROUND

1 DIR USARL  
AMSRD ARL CI OK TP (BLDG 4600)



NO. OF  
COPIES ORGANIZATION

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRD ARL CI  
R NAMBURU  
2800 POWDER MILL RD  
ADELPHI MD 20783-1197

ABERDEEN PROVING GROUND

48 DIR USARL  
AMSRD ARL CI HC  
P CHUNG  
D GROVE  
J KNAP  
AMSRD ARL WM  
S KARNA  
J MCCAULEY  
T WRIGHT  
AMSRD ARL WM BD  
B FORCH  
AMSRD ARL WM MA  
W NOTHWANG  
AMSRD ARL WM MD  
B CHEESEMAN  
G GAZONAS  
AMSRD ARL WM TA  
R DONEY  
T JONES  
S SCHOENFELD  
AMSRD ARL WM TC  
T BJERKE  
T FARRAND  
M FERMEN-COKER  
L MAGNESS  
S SEGLETES  
B SCHUSTER  
A TANK  
W WALTERS  
AMSRD ARL WM TD  
S BILYK  
D CASEM  
J CLAYTON (15 CPS)  
D DANDEKAR  
N GNIAZDOWSKI  
M GREENFIELD  
Y HUANG  
R KRAFT  
B LOVE  
M RAFTENBERG  
E RAPACKI  
M SCHEIDLER  
T WEERASOORIYA

INTENTIONALLY LEFT BLANK.